






Size: AA 2500 mAh (HR6) Rechargeable NiMH Battery



Specifications	
Classification:	Cylindrical Rechargeable
Chemical System:	Nickel Metal Hydride (NiMH)
Designation:	ANSI-1.2H1, IEC-HR6
Nominal Voltage:	1.2V
Operating Voltage:	1.0V -1.35V
Operating Temp:	-10°C to 50°C (14°F to 122°F)
Storage Temp:	5°C to 30°C
Typical Weight:	30 g
Typical Volume:	8.3 cubic centimeters (.50 cubic inch)
Typical Impedance:	20 milliohm @ 1kHz
Rated Capacity:	2500mAh
Safety Features:	Pressure release resettable vent

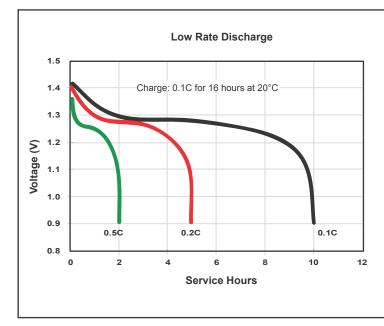

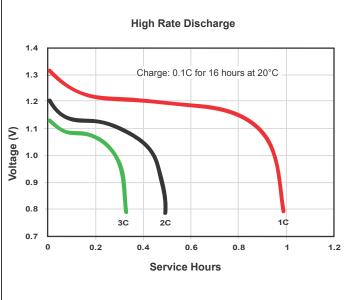

Information and contents in this data sheet are for reference purposes only. They do not constitute any warranty and representation is subject to change without notice. For most current information and further details, please contact Duracell.

Page 1 of 2 Document #: RE-A







Product can be charged on most nickel metal hydride (NiMH) chargers utilizing standard dV, dV/dt, time and temperature dynamic charge termination methods. Duracell brand chargers are recommended for best results.



Berkshire Corporate Park Bethel, CT 06801 U.S.A.

Telephone: Toll free 1.800.544.5454

Internet: www.duracell.com

*Delivered capacity is dependent on the applied load, intermittent usage, operating temperature and cut off voltage. Please refer to the charts for examples of energy/service life that the battery will provide for various conditions.

Information and contents in this data sheet are for reference purposes only. They do not constitute any warranty and representation is subject to change without notice. For most current information and further details, please contact Duracell.