

Technical specifications


Alkaline

Pro Power



LR03

Panasonic Typical Dimensions

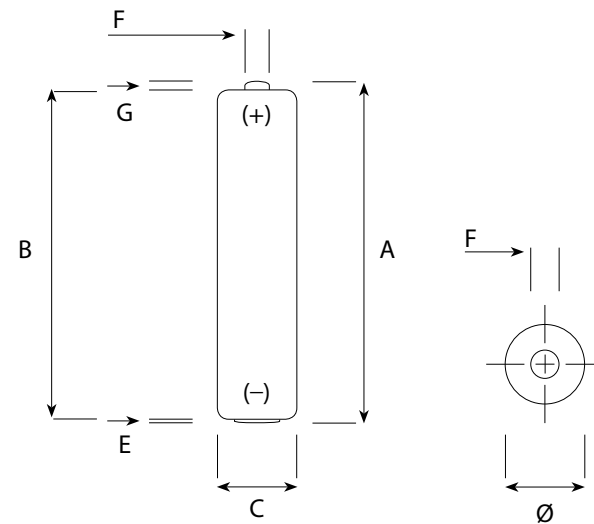

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	44,5	
B		43,3
C		4,3
E	0,5	
F	3,8	
G		0,8
Ø	10,5	9,5

Specifications

Name	LR03 / S / AAA / AM4 / MICRO / MN2400 / 24A / 24AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	11,2 g
Storage temp. range	+10°C ~ +25°C
Operating temp. range	-20°C ~ +45°C
Average Impedance	+/- 135 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation Nordic ecolabeling (white Swan) EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell






For more information:

www.panasonic-batteries.com

Panasonic
ideas for life

Typical discharge values

LR03

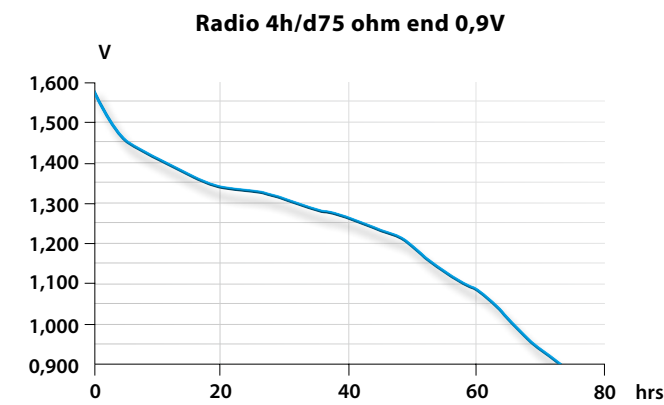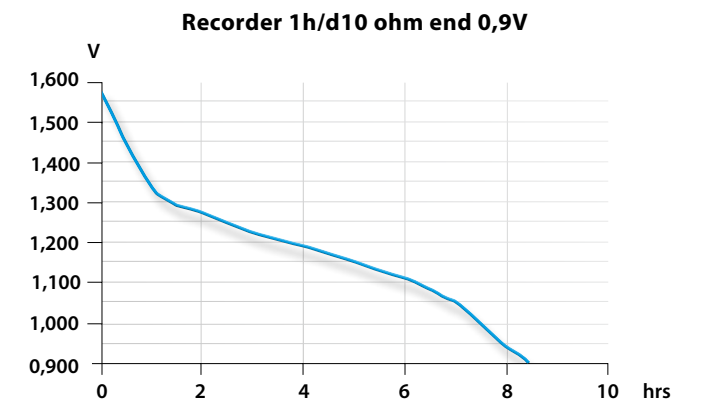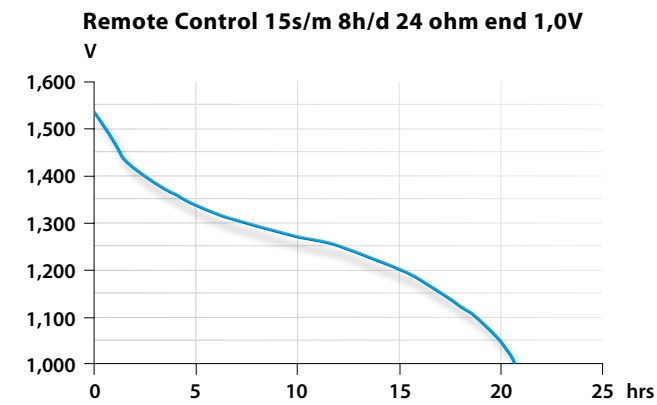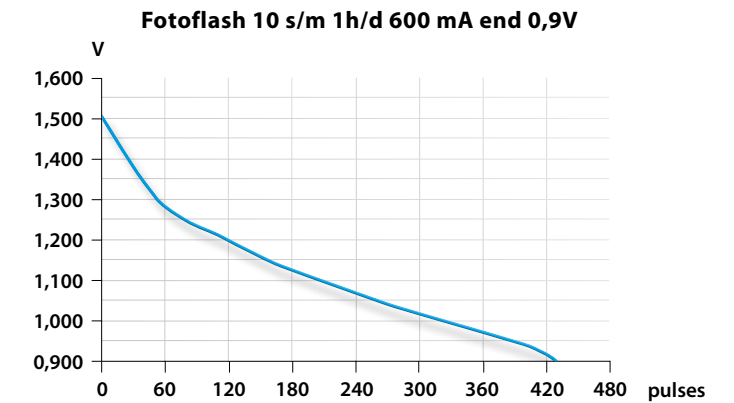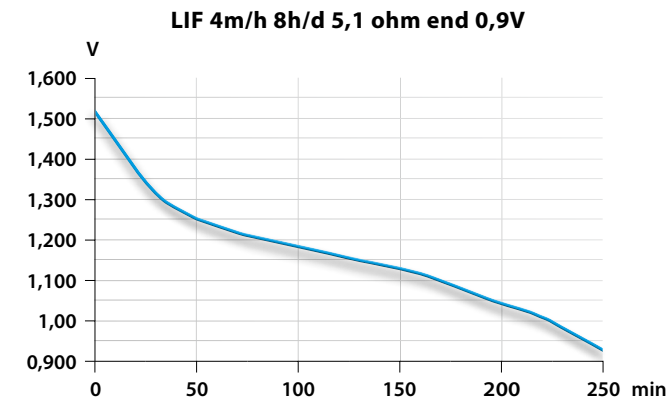

Copyright© Panasonic Energy Europe N.V. ("PECE") 2010 - All rights reserved. The information contained herein is believed to be correct. However no warranty is made, either expressed or implied regarding the accuracy or the results to be obtained from the use of such information. Test results are strictly according to IEC conditions. Capacities of batteries are depending on drain, temperature and cut-off voltage. Data are subject to change. 07/2010.

Promoter: Panasonic Energy Europe N.V., P. Celis, Brusselssesteenweg 502, 1731 Zellik, Belgium

For more information: www.panasonic-batteries.com